



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 982 900 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
01.03.2000 Bulletin 2000/09

(51) Int. Cl.<sup>7</sup>: H04L 12/56, H04J 3/24

(21) Application number: 99304876.8

(22) Date of filing: 22.06.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 27.08.1998 US 143466

(71) Applicant:  
NORTEL NETWORKS CORPORATION  
Montreal, Quebec H2Y 3Y4 (CA)

(72) Inventors:  
• Russell, John Paul  
Sawbridgeworth, Hertfordshire CM21 9BB (GB)

• Murton, Christopher David  
Chelmsford, Essex CM2 8AR (GB)  
• Goodman, David Michael  
St Albans, Hertfordshire AL4 9XA (GB)  
• Ramsden, Christopher Thomas William  
Hertford, Hertfordshire SG14 3ES (GB)  
• Shields, James  
Whitehead, Carrickfergus BT38 9NS (IE)

(74) Representative:  
Bewley, Ewan Stuart  
Nortel Networks  
Intellectual Property Law Group  
London Road  
Harlow, Essex CM17 9NA (GB)

### (54) Frame based data over synchronous digital hierarchy network

(57) A frame based data communications network is interfaced to a synchronous digital hierarchy network via a plurality of frame based data port cards incorporated into a plurality of synchronous multiplexers. Each port card comprises a conventional frame based data port, a frame switch, a rate adapter means and a mapping means for mapping data frames into a plurality of SDH virtual containers. Frame based data is incorporated directly into a synchronous virtual container without encapsulation in an intermediate protocol. A number of topologies of a frame based data channel network are possible, overlaid on the underlying synchronous transport network, including an open loop topology, a ring mode topology, and a backhaul topology.

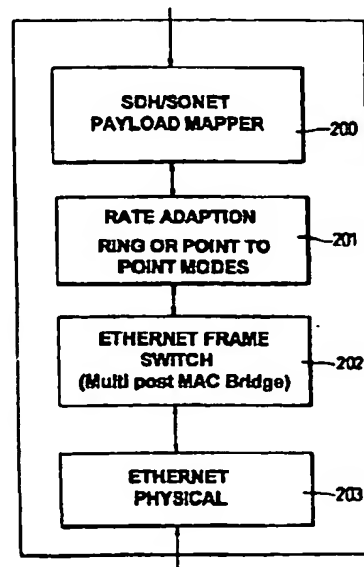


Fig. 2

EP 0 982 900 A2

packet on Sonet (POS phy) system of PMC Sierra. However, in this scheme, a high packetization overhead is present and packaging delays are relatively high.

[0010] Manufacturers such as CISCO, and Bay Networks produce equipment for both of the above mentioned inverse multiplexing of ATM, and Ethernet bridge systems.

5 [0011] A further prior art scheme uses a plurality of fiber optic repeaters to provide native Ethernet rate connections between a customer premises and a LAN switch. However, this solution dedicates a whole fiber to Ethernet rate, which is an inefficient use of the fiber optic cable resources.

### Summary of the Invention

10 [0012] One object of the present invention is to provide high data rate, high reliability functionality available with conventional local area networks, but over a wide area network transported on a long distance high capacity synchronous digital network.

[0013] Another object of the present invention is to overcome data rate mis-matched between conventional datacoms systems and conventional telecommunications systems in an efficient manner.

[0014] Another object of the present invention is to incorporate frame based data directly into a synchronous digital hierarchy payload, without encapsulation in an ATM cell or other intermediate carrier.

[0015] Another object of the present invention is to incorporate frame based data into a synchronous network without incurring high processing delays, and without incurring a high packetization header overhead.

20 [0016] According to one aspect of the present invention, there is provided a frame based data communications network comprising:

a plurality of computer devices each having a frame based data channel interface;  
a plurality of synchronous multiplexers, each having a frame based data channel interface and a synchronous digital communications port, and capable of interfacing between a frame based data protocol and a synchronous digital network protocol;  
25 wherein said plurality of computing devices communicate with each other over a plurality of frame based data channels, said frame based data channels carried over a synchronous digital transport network connecting said plurality of synchronous multiplexers.

30 [0017] Preferably, said frame based channel interface interfaces directly between said frame based data protocol and said synchronous digital network protocol without traversing any intermediate protocols.

[0018] Preferably, said frame based data channel interface comprises: means for mapping a data frame of said frame based data channel to at least one payload of said synchronous network protocol.

35 [0019] The synchronous digital transport network may comprise a synchronous digital hierarchy (SDH) network in accordance with ITU-T G70.X, an example of which is the synchronous optical network (SONET) in accordance with ITU-T recommendation G.708 and related recommendations.

[0020] Synchronous multiplexers may comprise add-drop multiplexers, or terminal multiplexers.

40 [0021] According to a second aspect of the present invention, there is provided a synchronous digital multiplexer comprising:

a plurality of telecoms tributary interfaces;  
a frame based data channel interface; and  
45 a synchronous digital channel port.

[0022] By providing a plurality of telecoms tributaries in addition to a frame based data access port in a synchronous multiplexer, frame based data channels may be entered directly into synchronous digital hierarchy virtual container payloads in an efficient manner.

[0023] Preferably said frame based channel interface comprises:

50 a frame based data channel physical port;  
a frame based data channel switch communicating with said frame based data channel physical port;  
a rate adaption means for converting data at a frame based data channel rate into a bitstream of a data rate capable of being carried in at least one virtual container; and  
55 a synchronous digital network payload mapper for mapping said bitstream into said at least one virtual container.

[0024] According to a third aspect of the present invention there is provided a method of communicating frame based data over a synchronous digital network comprising the steps of:

modifying a data rate of said frame based data to a rate compatible with a synchronous digital network virtual container; and  
inputting said rate adapted frame based data directly into at least one said synchronous digital network virtual container.

[0025] Preferably said method comprises the steps of:

concatenating a plurality of said virtual containers together; and  
containing a said data frame into said plurality of concatenated virtual containers.

[0026] The invention includes a method of creating a frame based data channel within a synchronous digital channel comprising the steps of:

modifying a data rate of said frame based data outside said synchronous digital channel to a rate compatible with said synchronous digital channel; and  
mapping said rate adapted frame based data directly to said synchronous digital channel.

[0027] Said step of mapping preferably comprises containing said modified data frame based data into at least one virtual container.

[0028] The invention includes a communications network comprising:

a plurality of network components supporting an OSI layer 2 frame based data channel;  
a plurality of network components supporting at least one synchronous digital channel; and  
a plurality of network components capable of transferring data frames of said OSI layer 2 data channel directly into and out of a plurality of payloads of said at least one synchronous digital channel.

[0029] The invention includes a data communications network comprising:

a plurality of network devices each comprising: an OSI layer 2 frame switching device; a rate adaption device for adapting a data rate between an OSI layer 2 data rate and a synchronous transmission data rate; and a mapping device for mapping data between said OSI layer 2 frame switch and a synchronous digital channel;  
wherein said plurality of mapping devices communicate over said synchronous digital channel; and  
said plurality of OSI layer 2 frame switching devices communicate over an OSI layer 2 channel carried on said synchronous digital network.

[0030] Said OSI layer 2 channel may comprise a ring channel linking said plurality of network devices.

[0031] Said OSI layer 2 channel may comprise a plurality of point to point channels linking pairs of individual said OSI layer 2 frame switches.

[0032] The invention includes a communications network comprising:

a plurality of network devices each comprising: a rate adaption device for adapting a data rate between an OSI layer 2 data rate and a synchronous transmission data rate; and a mapping device for mapping data between an OSI layer 2 channel and a synchronous digital channel;  
wherein said plurality of mapping means communicate over said synchronous digital channel; and  
said plurality of rate adaption means communicate over said OSI layer 2 channel carried on said synchronous digital channel.

[0033] Said OSI layer 2 channel may comprise a ring channel.

#### **Brief Description of the Drawings**

[0034] For a better understanding of the invention and to show how the same may be carried into effect, there will now be described by way of example only, specific embodiments, methods and processes according to the present invention with reference to the accompanying drawings in which:

FIGURE 1 illustrates schematically elements of a first embodiment data network carrying a frame based data channel over a synchronous data channel,

FIGURE 2 illustrates schematically a frame based data channel port component of a synchronous digital multi-

plexer according to a first embodiment of the present invention;

FIGURE 3 illustrates schematically a prior art synchronous digital hierarchy multiplexing structure;

FIGURE 4 illustrates schematically a synchronous digital hierarchy; STM frame and payload;

FIGURE 5 illustrates schematically a plurality of synchronous digital multiplexers connected together by means of a plurality of frame based data ports, supporting an Ethernet tandem switching mode channel carried on a synchronous digital loop;

FIGURE 6 herein illustrates a plurality of synchronous digital multiplexers, each having a frame based data port, supporting an Ethernet ring carried on an underlying synchronous digital loop;

FIGURE 7 illustrates schematically a logical view of the Ethernet ring and synchronous digital loop of Fig. 6;

FIGURE 8 illustrates schematically a plurality of synchronous digital multiplexers each having a frame based data port, supporting a plurality of point to point Ethernet channels in a backhaul mode of connection, carried over a synchronous digital loop;

FIGURE 9 herein illustrates a first example of a deployment of a frame based data channel over a synchronous digital hierarchy network;

FIGURE 10 illustrates schematically a second example of deployment of frame based data channels over a synchronous digital hierarchy network; and

FIGURE 11 illustrates schematically a third example of deployment of a plurality of frame based data channels over a synchronous digital hierarchy network.

## **20 Detailed Description of the Best Mode for Carrying Out the Invention**

[0035] There will now be described by way of example the best mode contemplated by the inventors for carrying out the invention. In the following description numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be apparent however, to one skilled in the art, that the present invention may be practiced without limitation to these specific details. In other instances, well known methods and structures have not been described in detail so as not to unnecessarily obscure the present invention.

[0036] Referring to Fig. 1 herein, there is illustrated schematically elements of a first embodiment data network according to the present invention. A frame based data communications system carried over a synchronous digital network is provided by the arrangement shown in Fig. 1. In this specification, the terms synchronous network and synchronous digital network are used to refer to a time division multiplexed synchronous transport layer in OSI layer 1. Conventional examples of such networks include the synchronous digital hierarchy (SDH) of ITU-T recommendation G70.X, which incorporates synchronous optical network (SONET) systems specified in ITU-T recommendation G.709 and related recommendations. The data network elements comprise first and second synchronous digital terminal multiplexers, 100, 101 connected to each other by an optical fiber communications link 102; a first datacoms router 103 communicating with first terminal multiplexer 100; a second datacoms router 104 communicating with second terminal multiplexer 101; a first computer device 105 communicating with first datacoms router 100; and a second computer device communicating with second datacoms router 104. Each of first and second computer devices 105, 106, first and second routers 103, 104 and first and second terminal multiplexers 100, 101 comprise a frame based data channel interface. First and second computer devices communicate frame based data with each other over the routers and over the optical fiber communications link. Communication between first and second multiplexers 100, 101 is via a synchronous digital network protocol, for example the synchronous digital hierarchy protocol (SDH) or synchronous optical network protocol (SONET) as specified in ITU-T recommendation G.709 and related recommendations. Communication between the computing devices 105 and 106 and the respective datacoms routers 103, 104 is by conventional data frame based data communications protocol.

[0037] In this specification, the term frame based data communications protocol or system is used to refer to any data communications system or protocol in which blocks of data are assembled within OSI layer 2. Both traffic data and control data may be contained within the OSI layer 2 frame. Frames in OSI layer 2 systems may comprise packets or blocks of data bytes of variable length. Examples of conventional frame based data communications protocols include IEEE standard 802.3 CSMA/CD local area network systems, Ethernet systems, conventional token ring systems, conventional token bus systems, conventional fiber distributed data interface FDDI systems and conventional dual queue dual bus (DQDB) systems

[0038] Communication between first and second routers 103, 104 and respective first and second terminal multiplexers 100, 101 is by a frame based data technology as will be understood by those skilled in the art. First and second terminal multiplexers 100, 101 may be separated geographically by distances from the order of a few meters to thousands of kilometers. The arrangement shown in Fig. 1 is a simplified arrangement, and in practice many computer devices, many routers and many multiplexers will be interconnected to form an integrated frame based data communications system carried over a synchronous digital network.

[0039] As mentioned hereinbefore, a problem with transporting data contained in conventional datacoms frame based

data systems over conventional synchronous digital telecoms transport systems is that there is a mis-match of data rates between the datacoms domain and the telecommunications domain.

[0040] Therefore, for communication of datacoms systems data at first and second routers 103, 104 with first and second terminal multiplexers 100, 101 efficient conversion between the frame based data datacoms system and the synchronous digital network protocols needs to be achieved.

[0041] Hereinafter, specific methods and embodiments according to a best mode herein will be described specific to synchronous digital hierarchy telecommunications systems in accordance with ITU recommendation G.709, and an IEEE standard 802.3 frame based data carrier system, a representative example of which is the Ethernet system. However, the general principles, methods and apparatus according to the present invention encompass synchronous digital networks in general, and OSI layer 2 frame based data carrier systems in general, and are not restricted to the specific examples of synchronous digital hierarchy networks or Ethernet networks.

[0042] Referring to Fig. 2 herein, there is illustrated schematically components of an Ethernet port card comprising a synchronous digital multiplexer. The Ethernet port card is incorporated into a synchronous digital hierarchy multiplexer (or a SONET multiplexer), so that as well as having a plurality of tributary interfaces for telecoms channels, for example E1, T1, E3, T3, STM-1, the multiplexer also has an interface for frame based data systems, eg Ethernet.

[0043] Fundamentally, SDH multiplexers operate to time division multiplex bit oriented data. A plurality of lower data rate telecoms tributaries are multiplexed into a set of virtual containers operating at higher data rates. The SDH multiplexing structure according to ITU-T recommendation G.70X is illustrated schematically in Fig. 3 herein. A set of STM frames are assembled to contain a plurality of virtual containers which are carried as an STM payload as illustrated in Fig. 4 herein. On the other hand, conventional datacoms routers and equipment are frame oriented devices which operate on packets of data. The Ethernet port card adapts the Ethernet data frames to a rate which matches a rate which can be multiplexed into a virtual container, and maps each Ethernet data frame into one or more SDH virtual containers directly without any further encapsulation in intermediate protocols.

[0044] For example, a 10 MBits/s Ethernet channel may be mapped onto 5 VC12 containers, each VC12 container having a rate of 2.048 MBits/s. The 5 VC12 containers are concatenated together to carry the 10 MBits/s Ethernet channel. For entry of a 100 MBits/s Ethernet channel into the synchronous network, a single 100 MBits/s Ethernet channel may be mapped into 2 concatenated VC3 containers each having a capacity of 51.84 MBits/s to carry an Ethernet 1 GBits/s channel over a synchronous network, the Ethernet channel is mapped into 7 VC4 containers, each having a capacity of 139 MBits/s.

[0045] The Ethernet port card of Fig. 2 herein comprises a conventional Ethernet physical port 201, the Ethernet physical port communicating with an Ethernet frame switch 202 which may comprise a conventional frame switch, such as available from Plaintree, MMC, or TI; a rate adaption means 203 for adapting between Ethernet rates and SDH rates equivalent to the rates of the virtual containers; and an SDH payload mapper 204 for mapping Ethernet frames into one or more SDH payloads. Rate adaption means 203 and SDH payload mapper 204 may be implemented as a field programmable gate array (FPGA) or an application specific integrated circuit (ASIC).

[0046] Operation of SDH payload mapper 204 is disclosed in the applicant's co-pending US patent application entitled "Payload Mapping in SDH Networks", a copy of which is filed herewith. Data frames are mapped directly into SDH virtual containers for transport across an SDH network without adapting through any intermediate protocols.

[0047] Rate adaption means 203 comprises a first plurality of Ethernet ports operating at 10 MBits/s; and 100 MBits/s in accordance with IEEE standard 802.3; and a second plurality of ports operating at 2 MBits/s, 50 MBits/s and 100 MBits/s communicating with SDH payload mapper 204. Rate adaption means 203 comprises a plurality of through channels for adapting IEEE standard 802.3 data frames into bitstreams having data rates of 2 MBits/s, 50 MBits/s and 100 MBits/s. Rate adaption means 203 comprises a plurality of multiple channels each adapting an IEEE standard 802.3 rate data frame channel to a 2 MBits/s, 50 MBits/s or 100 MBits/s bitstream channel. Rate adaption means 203 operates effectively as a packet buffer, since Ethernet Data Frames issue from the Ethernet frame switches at a higher rate than they can be multiplexed into SDH virtual containers. Rate adaption means 203 inputs Ethernet data frames from Ethernet frame switches 202 faster than it outputs the Ethernet data frames into the SDH virtual containers. Ethernet data frames are stored in rate adaption means 203. If the buffer stores within rate adaption means 203 become overloaded, the rate adaption means initiates flow control by sending signals back to the Ethernet frame switch to delay sending a further Ethernet frame until the buffer in the rate adaption means has sufficient capacity to accept new Ethernet data frames.

[0048] In a further embodiment, rate adaption means 203 may be replaced by prior art commercially available POS phy chips available from PMC Sierra.

[0049] SDH payload mapper 204 communicates with the plurality of bitstream channels of rate adaption encapsulator 203. SDH payload mapper maps the plurality of bitstream channels of rate adaption means 302 into a plurality of SDH payloads, for example VC3, VC4 or VC12 thereby accessing the synchronous digital hierarchy network.

[0050] Provision of a frame data port in a synchronous digital multiplexer enables a number of methods of interconnecting a frame data channel over a synchronous digital channel as will now be described.

[0051] Referring to Fig. 5 herein, there is illustrated a first interconnection scheme of a plurality of multiplexers in a synchronous digital hierarchy network for connecting multiplexers in a tandem mode. First to fifth line cards 501 - 505 each comprise a SDH payload mapper, a rate adaption means, an Ethernet frame switch and an Ethernet physical port as described hereinbefore. An SDH payload mapper of each card 506-510 respectively are connected together in a synchronous channel 511, shown as a solid line in Fig. 5. The SDH ring may comprise a VC12, VC3 or VC4 containment. The synchronous channel carries an Ethernet channel 512, shown as a doffed line in Fig. 5 carrying frame based data, the Ethernet channel extending within each card through the SDH payload mapper, through the rate adaption means 513-517, and into the Ethernet frame switch 518-522 respectively of each card.

[0052] In this method, Ethernet switching is achieved at frame switches 518-522. Rate adaption occurs within the Ethernet ring at Ethernet data rates, as the Ethernet data frames enter into and out of the SDH ring 511 over which they are carried. Ethernet frames are effectively carried over a carrier sense multiple access ring node (CSMA-RN), over a synchronous digital channel 511.

[0053] Referring to Fig. 6 herein, there is illustrated a ring mode of operation between a plurality of Ethernet port cards of a plurality of synchronous digital hierarchy multiplexers. Similarly, as with Fig. 5, each Ethernet port card 501-505 is connected via its corresponding SDH mapper to form a synchronous network. An Ethernet channel 600 is connected in a ring mode between the rate adaption means of each Ethernet port card 513-517 respectively. The Ethernet ring channel does not enter the Ethernet switches 518-522, but is transported through the respective rate adapters 513-517 of the port cards. This may provide an advantage of reducing delays in the Ethernet ring by avoiding rate adaption delays, and passage through the Ethernet switches, and improve scalability of the ring. Further, fast protection of the ring under conditions of ring failure may be achieved. The Ethernet ring may provide a low delay, high output Ethernet communications channel.

[0054] Referring to Fig. 7 herein there is illustrated schematically in logical view the ring mode connections of Fig. 6 herein. Data flow through the rate adaptation components provides dual ring carrier sense multiple access rings.

[0055] Referring to Fig. 8 herein, there is illustrated a third, backhaul, connection scheme for connection of Ethernet channels over a synchronous digital hierarchy network between a plurality of SDH multiplexers. In the backhaul connection mode of Fig. 8, instead of using an OSI layer 2 scheme as illustrated in Figs. 5, 6 and 7 herein, Ethernet channels are carried over a physical tree of virtual container paths carried over the SDH ring 511. A plurality of Ethernet channels 800-803 are carried over the SDH ring 511. In Fig. 8, the Ethernet channels are shown schematically by their logical connections to the plurality of Ethernet ports 501, 505, although physically transport is over the same physical resources, within the SDH network. A plurality of Ethernet channels arranged in the tree arrangement are physically carried as virtual containers over an SDH ring 511. As with the channel arrangement of Figs. 5, 6 and 7, ring protection may be applied to the arrangement of Fig. 8. Each Ethernet channel is connected between a pair of Ethernet frame switches, and undergoes rate adaption for entry and exit to the SDH ring.

[0056] The three modes of operation presented herein in Figs. 5 to 8 herein, may be integrated within conventional synchronous digital hierarchy networks, using the Ethernet port cards as entry and exit ports for Ethernet channels in various combinations within an SDH network. Some examples of usage of an Ethernet channel within a synchronous network are described herein with reference to Figs. 9 to 12.

[0057] Referring to Fig 9 herein, using the basic architecture illustrated with reference to Fig. 1 in an overall telecoms system, based on a synchronous digital network 900 voice and data services may be provided in a synchronous digital multiplexer by integrating both conventional telecoms channels, for example E1, and frame based data channels, for example Ethernet. In the example shown in Fig. 9, at an end user location 901, a PBX 902 may communicate with a synchronous terminal multiplexer 903 in conventional manner and an Ethernet switch 904 may communicate directly with the synchronous multiplexer via, for example a 100 Mbits/s link 905 to provide a private frame based data network via a central office location 906 supporting a public frame data channel signified by router 907. Similarly, Ethernet switch 904 may access a public data frame network via a firewall router 908.

[0058] Referring to Fig. 10 herein, there is illustrated schematically how a combination of the connectivity schemes described in relation to Figs. 5 to 8 herein may operate in a new synchronous digital hierarchy network.

[0059] The example synchronous network of Fig. 10 comprises an STM-16 ring 1000 accessible through a plurality of add-drop multiplexers 1001-1004. A plurality of terminal multiplexers 1005-1029 may be provided, one per customer premises equipment. At each customer premises equipment, access to the synchronous network is made via a corresponding Ethernet port card in the synchronous multiplexer, which is connected to a corresponding respective Ethernet router 1030-1043. The plurality of terminal multiplexers may be connected synchronously to an intermediate multiplexer 1044 forming part of a sub-ring 1045. Connection between the intermediate multiplexer 1044 and the plurality of tributary multiplexers 1005-1029 may take the backhaul form as illustrated with reference to Fig. 8 herein, in which a plurality of Ethernet channels are carried over a synchronous ring. In the lower part of Fig. 10 herein, the plurality of Ethernet channels are shown logically as radiating from intermediate multiplexer 1044 to the plurality of terminal multiplexers 1005-1029. Within sub-ring 1045, the tandem switching mode, or the ring mode as described with reference to Figs. 5 to 8 herein may operate.

- [0060] Referring to Fig. 11 herein, there is illustrated schematically a second network layout incorporating a plurality of Ethernet frame based data channels transported across an underlying synchronous digital hierarchy network. An STM-64 synchronous ring 1100 links a plurality of add-drop multiplexers 1101-1105 in a synchronous loop. Various Ethernet frame based data channels may be transported over the underlying synchronous network as follows. In this example, a further Ethernet channel between first Ethernet router 1106 and second Ethernet router 1107 is carried over STM-64 ring 1100 between first and second add-drop multiplexers 1101, 1105, each of which are equipped with an Ethernet port as described hereinbefore. A second Ethernet channel between first Ethernet router 1106 and third Ethernet router 1108 of 1 Gbit/s is carried between a terminal multiplexer 1109 equipped with an Ethernet port as described hereinbefore, and an add-drop multiplexer 1104, for access to the STM-64 ring 1100.
- [0061] The specific embodiments and specific methods disclosed herein may enable the following advantages:
- [0062] Firstly, compared to the prior art systems which interface Ethernet through a conventional telecoms interface, eg E1, T1, by dispensing with the telecoms interface, by use of the Ethernet port card as described hereinbefore, an equipment cost saving may be achieved, because there is no need for adaption of Ethernet data into a telecoms interface, eg E1 or T1.
- [0063] Secondly, port consolidation may be achieved. Instead of having a large number of ports at a head end, as in prior art systems, one frame based data port per multiplexer may be provided. A saving on equipment and wiring may be achieved.
- [0064] Further, efficient utilization of channel capacity may be achieved in the synchronous network, through application of statistical gain between the frame based data rate channels and the synchronous data rate channels. For example, since frame based data channels are not always fully utilized, a plurality of frame based data rate channels may be multiplexed onto a synchronous rate channel of a same or similar data rate. For example, four 10 MBits/s data frame rate channels may be multiplexed onto a single 10 MBits/s synchronous rate channel, since the total traffic received from the four frame based data rate channels, which are not all fully utilized at the same time, may be statistically multiplexed onto a single 10 MBits/s synchronous data rate channel.
- [0065] Further, since the SDH virtual container payload data rates are relatively flexible, compared to conventional telecoms interface data rates, a more efficient match between Ethernet frame based data, operating at Ethernet data rates, and telecoms data rates in the synchronous domain can be achieved compared with E1, E3, STM-1 and STM-4 data rates. Table 1 herein illustrates a comparison of Ethernet data rates (in a central column of Table 1) with telecoms interface rates (in the left hand column of Fig. 1), and SDH virtual container rates (in the right hand column of Table 1). For example, a 10MBits/s Ethernet data rate can be accommodated neatly into 5 VC12 containers, each of 2 MBits/s. A 100 MBits/s Ethernet data rate can be accommodated in 2 VC3 containers, each of 50 MBits/s.

Table 1

| Telecoms            | Ethernet    | Synchronous Network                    |
|---------------------|-------------|--|
| E1 (2 MBits/s)      | 10 MBits/s  | 1-5xVC12 (2 MBits/s – 10 MBits/s)      |
| T1 (1.5 MBits/s)    | 10 MBits/s  | 1-8xVT 1.5 (2 MBits/s – 10 MBits/s)    |
| E3 (34 MBits/s)     | 100 MBits/s | 1-2xVC3 (50 MBits/s – 100 MBits/s)     |
| T3 (45 MBits/s)     | 100 MBits/s | 1-2xSTS-1 (50 MBits/s – 100 MBits/s)   |
| STM-1 (155 MBits/s) | 100 MBits/s | 1-2xVC3 (50 MBits/s – 100 MBits/s)     |
| OC-3 (155 MBits/s)  | 100 MBits/s | 1-2 x STS-1 (50 MBits/s – 100 MBits/s) |
| STM-4 (622 MBits/s) | 1GBits/s    | VC4-Nc (155 MBits/s – 1.2 GBits/s)     |
|                     |             | N = 1 – 8                              |
| OC-12 (622 MBits/s) | 1GBits/s    | STS-Nc (155 MBits/s – 1.2 Gbits/s)     |
|                     |             | N = 3, 6, 9, 12, 15, 18, 21, 24        |

[0066] Prior art telecoms interfaces which can be purchased for carrying frame based data over a wide area network operate at 2 MBits/s (E1), 34 MBits/s (E3), 155 MBits/s (STM-1) or 622 MBits/s (STM-4). These data rates are not well

matched to the prior art Ethernet data rates of 10 Mbits/s, 100 Mbits/s and 1 Gbits/s. On the other hand, the prior art Ethernet data rates are well matched to multiples of the synchronous digital hierarchy virtual container payload data rates, as illustrated in Table 1. The SDH payload data rates have a granularity of a minimum incremental step of 2 Mbits/s. A minimum granularity of Ethernet rates is 10 Mbits/s, and so 5 SDH VC12 containers can accommodate neatly a single 10 Mbits/s Ethernet channel.

[0067] A further feature of the specific embodiments and methods described herein is the provision of quality of service. By using the Ethernet IEEE 802.1 P/Q priority field, different packets can be given different priorities for transmission. Thus, quality of service levels which are achievable in prior art local area networks, may be extended over greater geographical distances carried over a synchronous digital hierarchy transport network as provided by the specific embodiments and methods of the present invention.

## Claims

1. A frame based data communications network comprising:
  - a plurality of computer devices each having a frame based data channel interface;
  - a plurality of synchronous multiplexers, each having a frame based data channel interface and a synchronous digital communications port, and capable of interfacing between a frame based data protocol and a synchronous digital network protocol;
  - wherein said plurality of computing devices communicate with each other over a plurality of frame based data channels, said frame based data channels carried over a synchronous digital transport network connecting said plurality of synchronous multiplexers.
2. The communications network as claimed in claim 1, wherein a said frame based data channel interface comprises:
  - means for mapping a data frame of said frame based data channel to at least one payload of said synchronous network protocol.
3. The communications network as claimed in claim 1, wherein said synchronous digital transport network comprises a synchronous optical network (SONET).
4. The communications network as claimed in claim 1, wherein a said synchronous multiplexer comprises an add-drop multiplexer.
5. The communications network as claimed in claim 1, wherein a said synchronous multiplexer comprises a terminal multiplexer.
6. A synchronous digital multiplexer comprising:
  - a plurality of telecoms tributary interfaces;
  - a frame based data channel interface; and
  - a synchronous digital channel port.
7. The synchronous multiplexer as claimed in claim 6, wherein said frame based channel interface comprises:
  - a frame based data channel physical port;
  - a frame based data channel switch communicating with said frame based data channel physical port;
  - a rate adaption means for converting data at a frame based data channel rate into a bitstream of a data rate capable of being carried in at least one virtual container; and
  - a synchronous digital network payload mapper for mapping said bitstream into said at least one virtual container.
8. A method of communicating frame based data over a synchronous digital network comprising the steps of:
  - modifying a data rate of said frame based data to a rate compatible with a synchronous digital network virtual container; and
  - inputting said rate adapted frame based data directly into at least one said synchronous digital network virtual container.



9. The method as claimed in claim 8 comprising the step of:

concatenating a plurality of said virtual containers together; and  
containing a said data frame into said plurality of concatenated virtual containers.

10. A method of creating a frame based data channel within a synchronous digital channel comprising the steps of:

modifying a data rate of said frame based data outside said synchronous digital channel to a rate compatible  
with said synchronous digital channel; and  
mapping said rate adapted frame based data directly to said synchronous digital channel.

11. The method as claimed in claim 10, wherein a said step of mapping comprises containing said modified data frame  
based data into at least one virtual container.

12. A communications network comprising:

a plurality of network components supporting an OSI layer 2 frame based data channel;  
a plurality of network components supporting at least one synchronous digital channel; and  
a plurality of network components capable of transferring said data frames of said OSI layer 2 data channels  
directly into and out of a plurality of synchronous frame payloads of said at least one synchronous digital chan-  
nel.

13. The communications network as claimed in claim 12, wherein said OSI layer 2 channel is carried over said synchro-  
nous channel.

14. A data communications network comprising:

a plurality of network devices each comprising: an OSI layer 2 frame switching device; a rate adaption device  
for adapting a data rate between an OSI layer 2 data rate and a synchronous transmission data rate; and a  
mapping device for mapping said data between said OSI layer 2 frame switch and a synchronous digital chan-  
nel;  
wherein said plurality of mapping devices communicate over said synchronous digital channel; and  
said plurality of OSI layer 2 frame switching devices communicate over an OSI layer 2 channel carried on said  
synchronous digital channel.

15. The network as claimed in claim 14, wherein said OSI layer 2 channel comprises a ring channel linking said plural-  
ity of network devices.

16. The network as claimed in claim 14, wherein said OSI layer 2 channel comprises a plurality of point to point chan-  
nels linking pairs of individual said OSI layer 2 frame switches.

17. A communications network comprising:

a plurality of network devices each comprising: a rate adaption means for adapting a data rate between an OSI  
layer 2 data rate and a synchronous transmission data rate, and a mapping device for mapping data between  
an OSI layer 2 channel and a synchronous digital channel;  
wherein said plurality of mapping means communicate over said synchronous digital channel; and  
said plurality of rate adaption means communicate over said OSI layer 2 channel carried on said synchronous  
digital channel.

18. The network as claimed in claim 17, wherein said OSI layer 2 channel comprises a ring channel.

19. A data communications network comprising:

a plurality of frame based data switches;  
a plurality of rate adaption means communicating with said plurality of frame based data switches, said rate  
adaption means for adapting a data rate of said frame based data to a synchronous digital data rate; and  
a plurality of mapping means for mapping said rate adapted frame based data onto a synchronous digital chan-

nel.

- 5
20. The communications apparatus as claimed in claim 19, wherein said synchronous digital channel comprises a ring channel connecting said plurality of mapping means.
- 10
21. The apparatus as claimed in claim 19, wherein said frame based data switching means form a frame based data communications ring carried over said synchronous digital channel.
22. The apparatus as claimed in claim 19, wherein said frame based data switching means are connected together in a plurality of point to point channels, said point to point channels carried over a synchronous digital channel connected between said plurality of mapping means.
23. A communications network comprising:
- 15
- a plurality of rate adaption means for adapting frame based data packets to a rate suitable for transport over a synchronous digital channel;
- a plurality of mapping means, said plurality of mapping means communicating with said plurality of rate adaption means, for transfer of frame based data between said mapping means and said rate adaption means;
- 20
- wherein said plurality of rate adaption means are interconnected to form at least one frame based data channel carried over a synchronous digital channel connected between said plurality of mapping means.
24. The communications network as claimed in claim 23, wherein said plurality of mapping means are connected by a synchronous digital network ring.
- 25
25. The apparatus as claimed in claim 23, wherein said frame based data channel is connected in a ring structure between said plurality of rate adaption means.

30


35

40


45

50


55

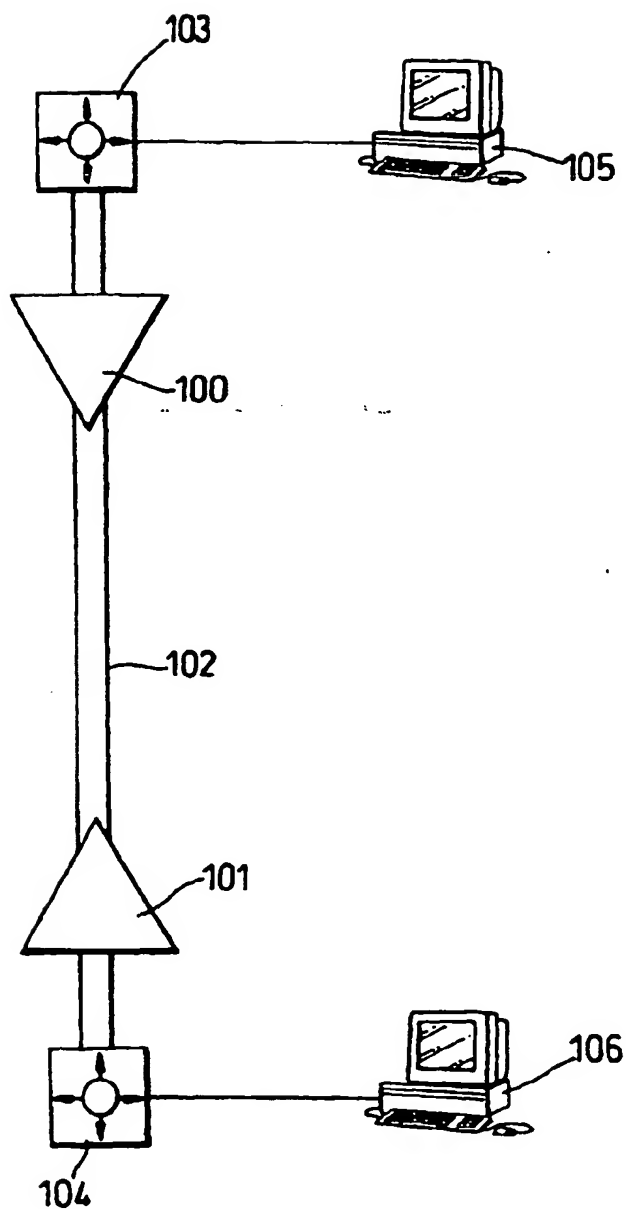


*Fig. 1*

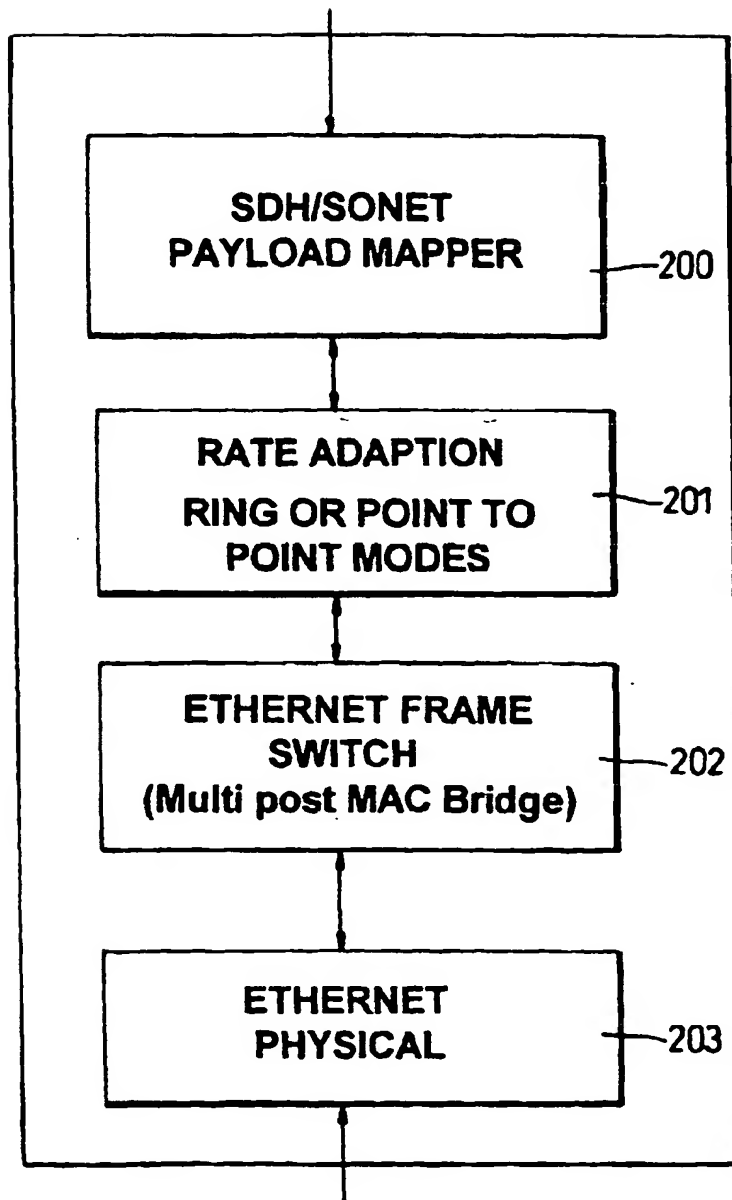


*Fig. 2*

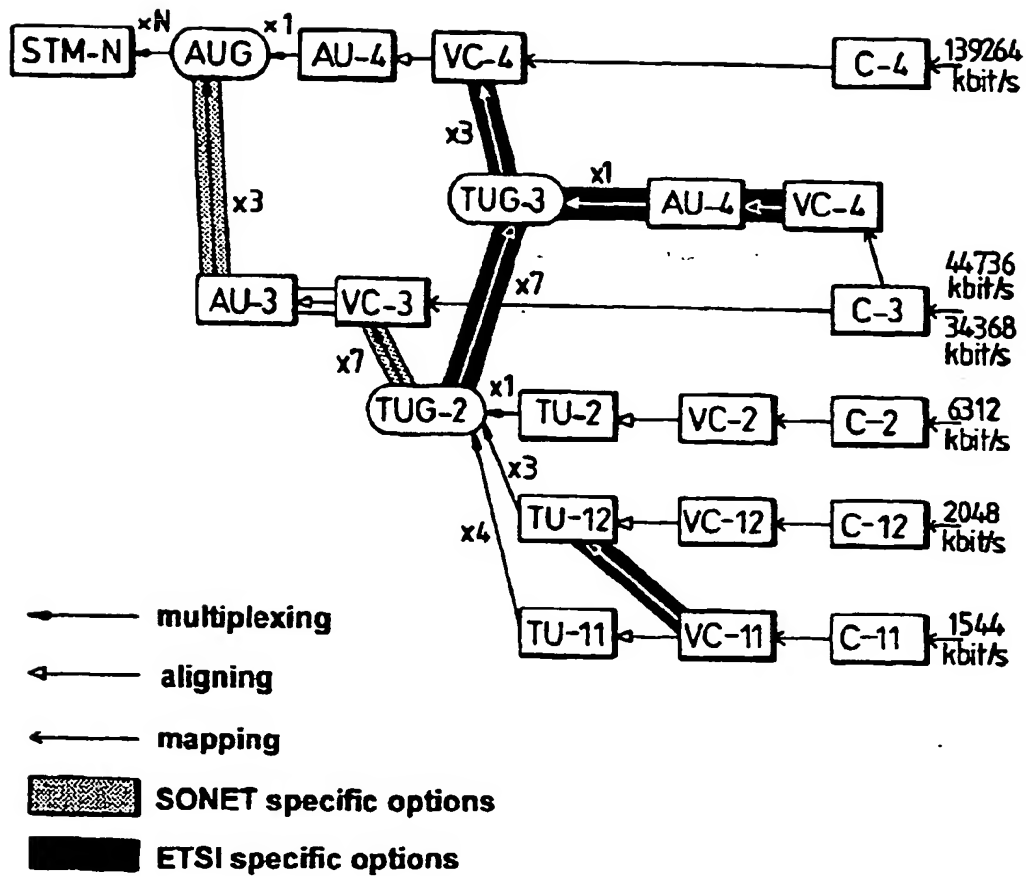


**Fig. 3**  
(Prior Art)

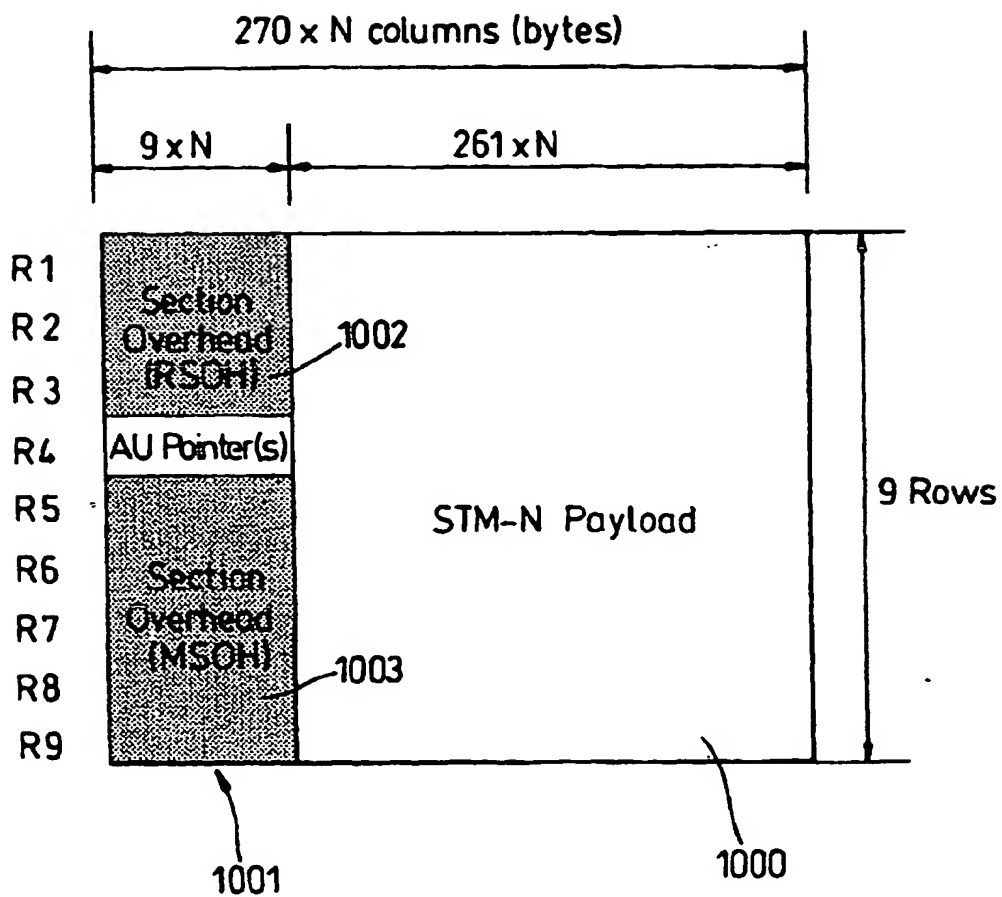

**Fig. 4**  
(Prior Art)

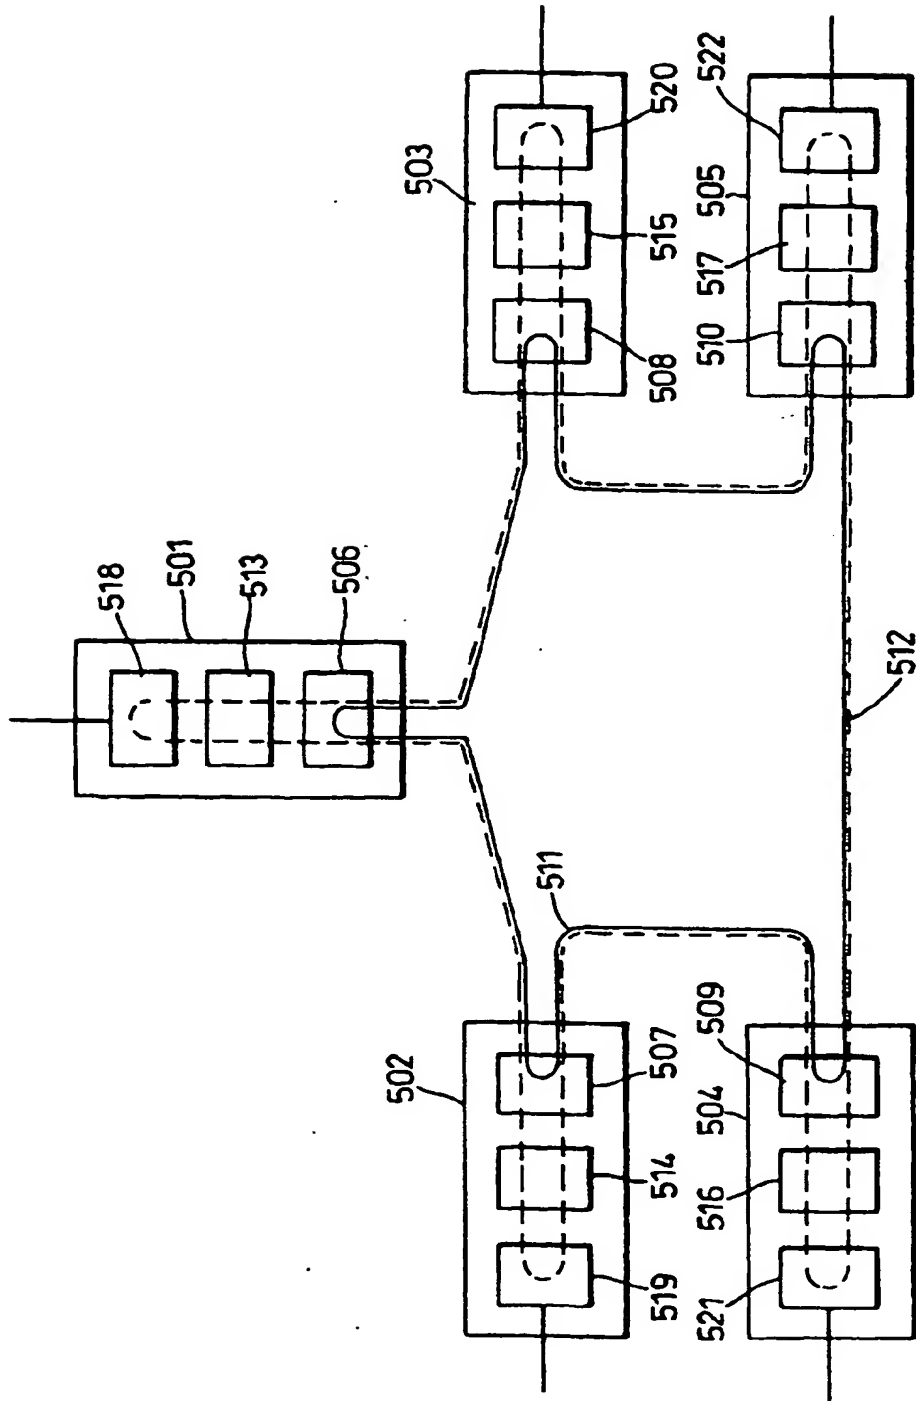


*Fig. 5*

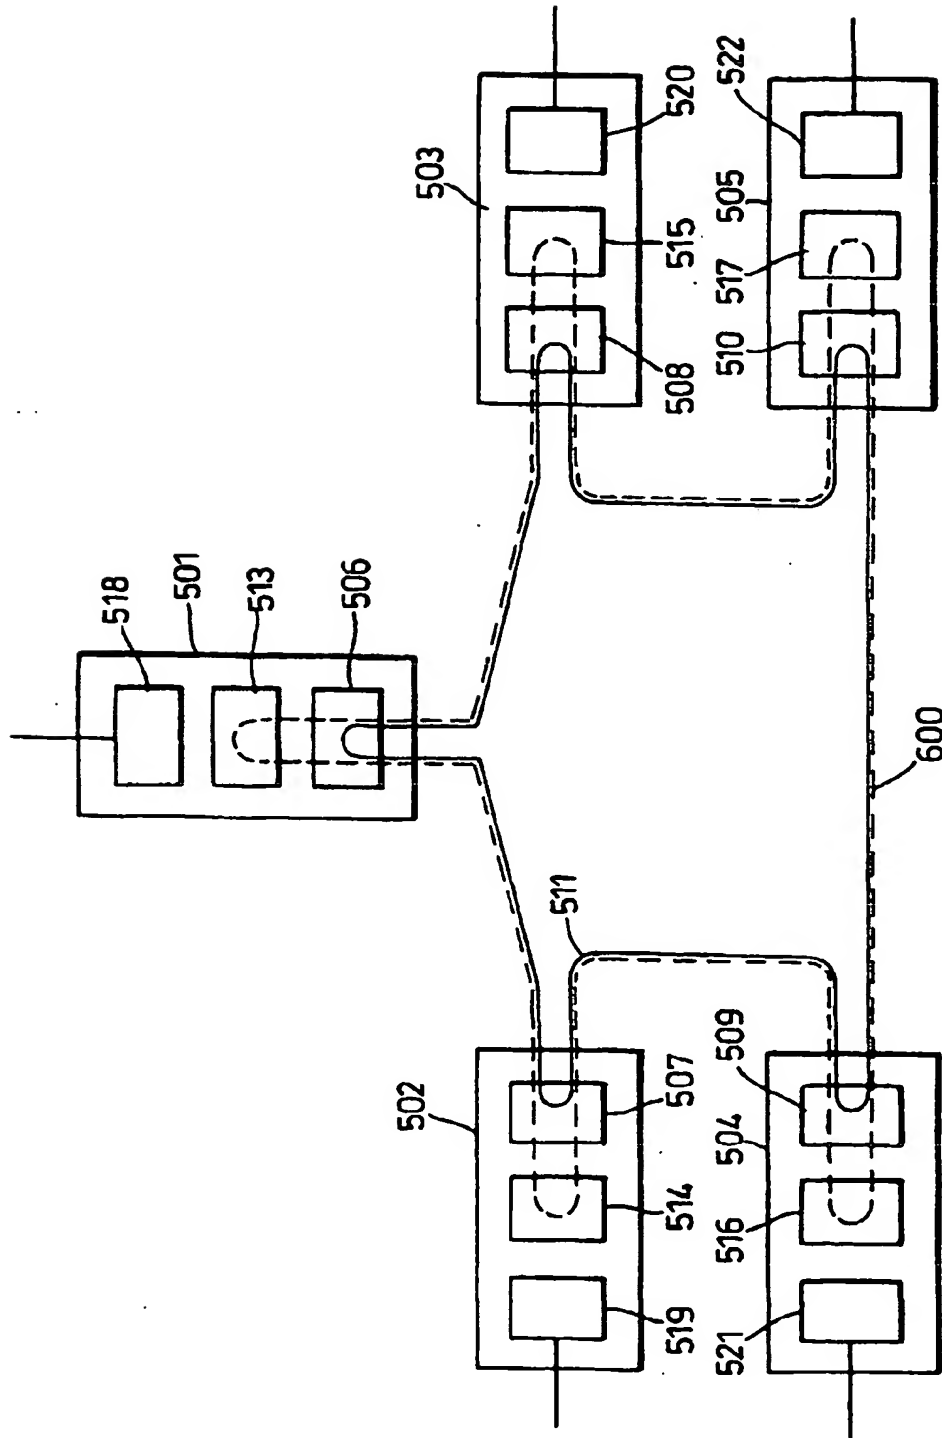


**Fig. 6**



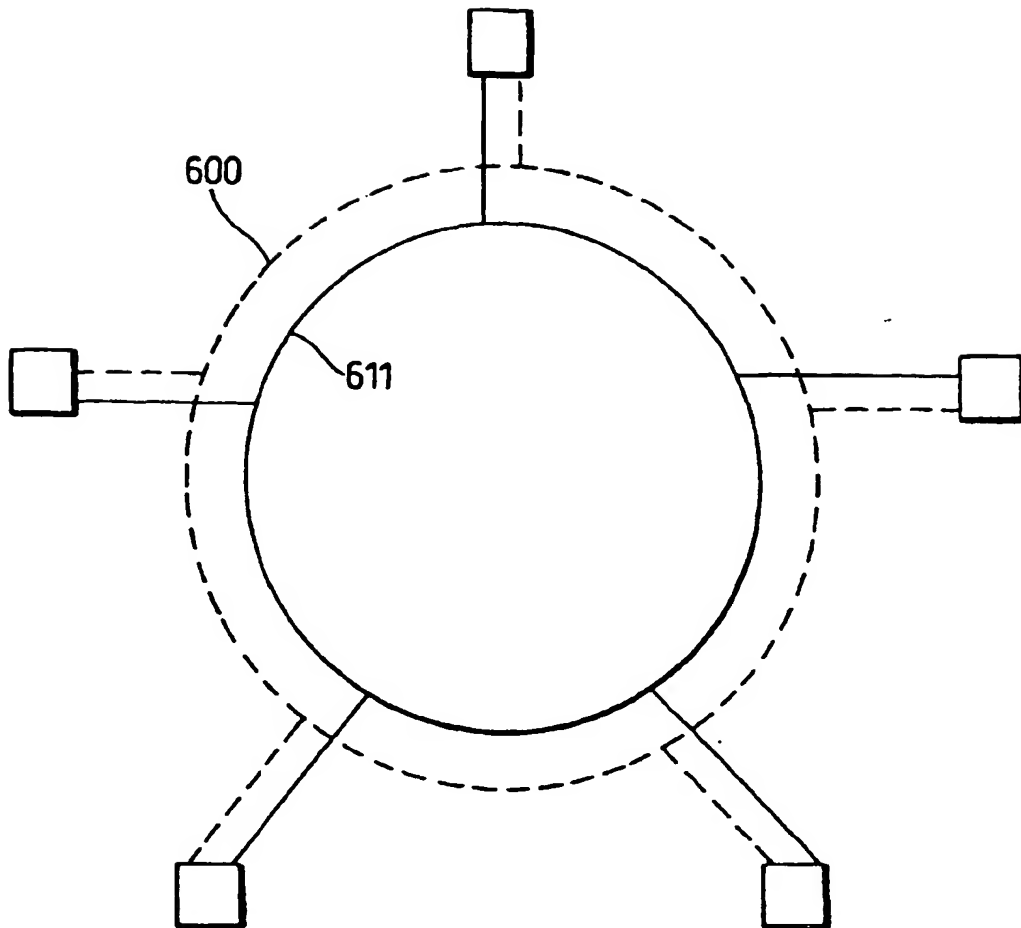

***Fig. 7***

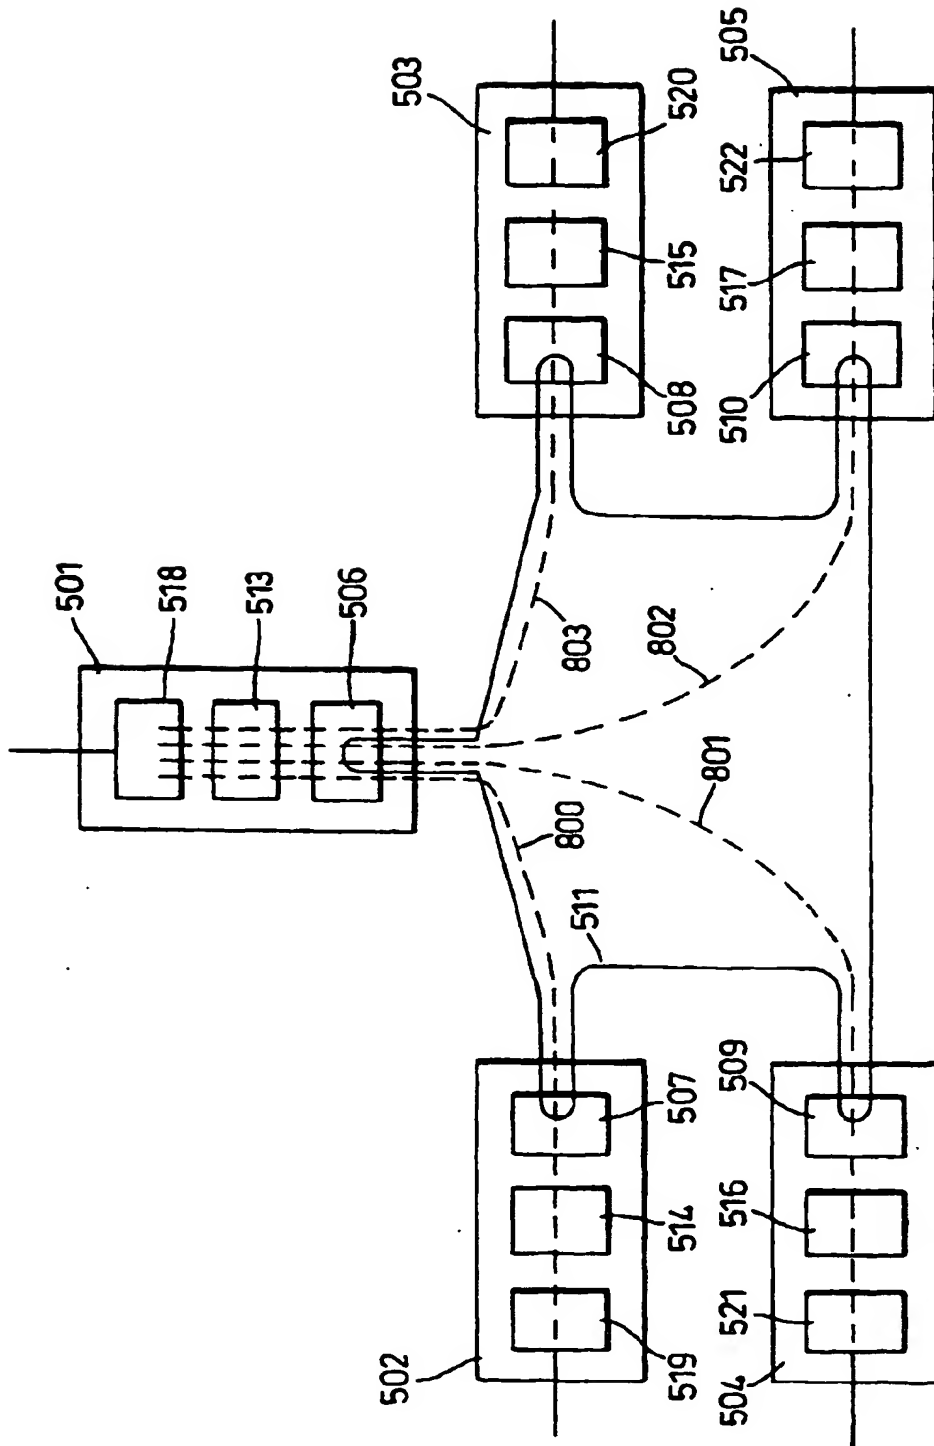

**Fig. 8**




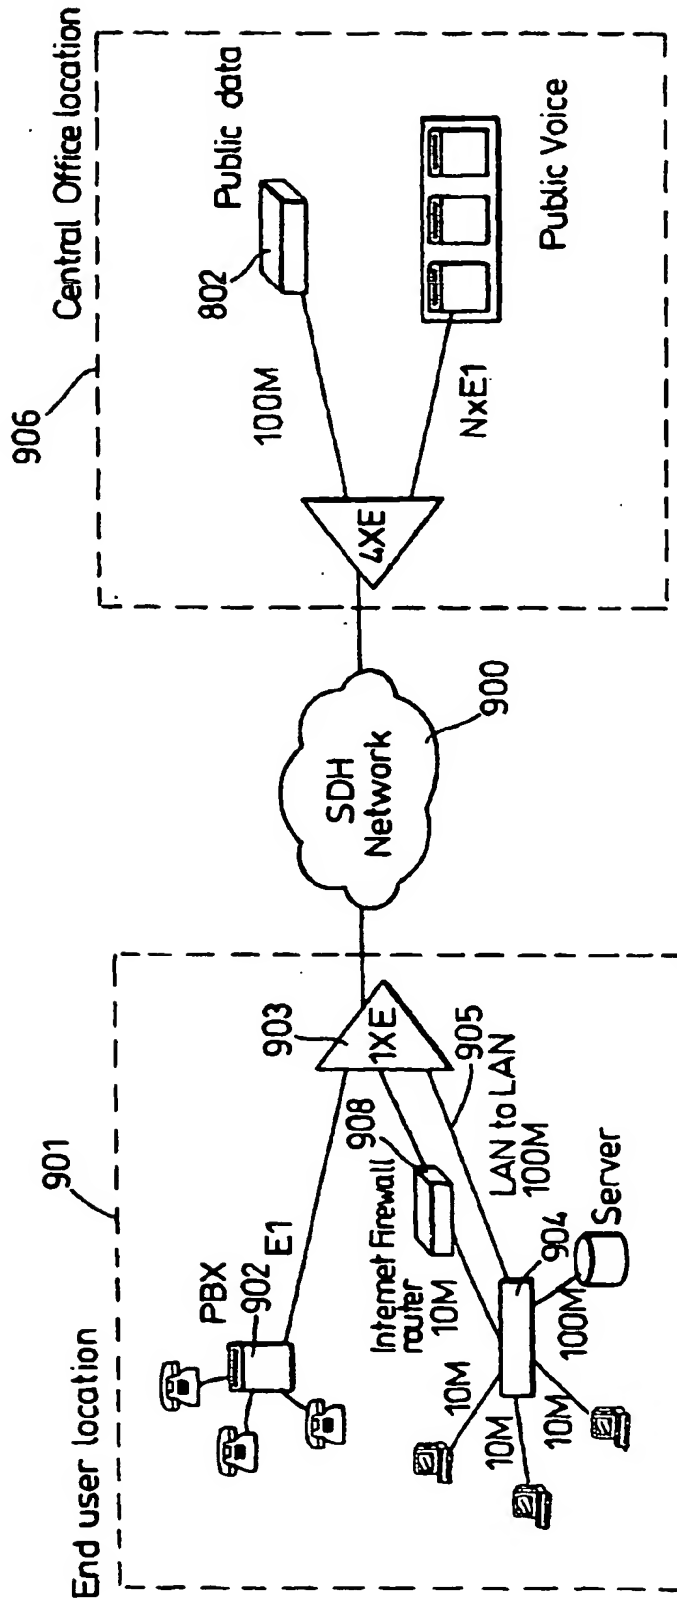


Fig. 9

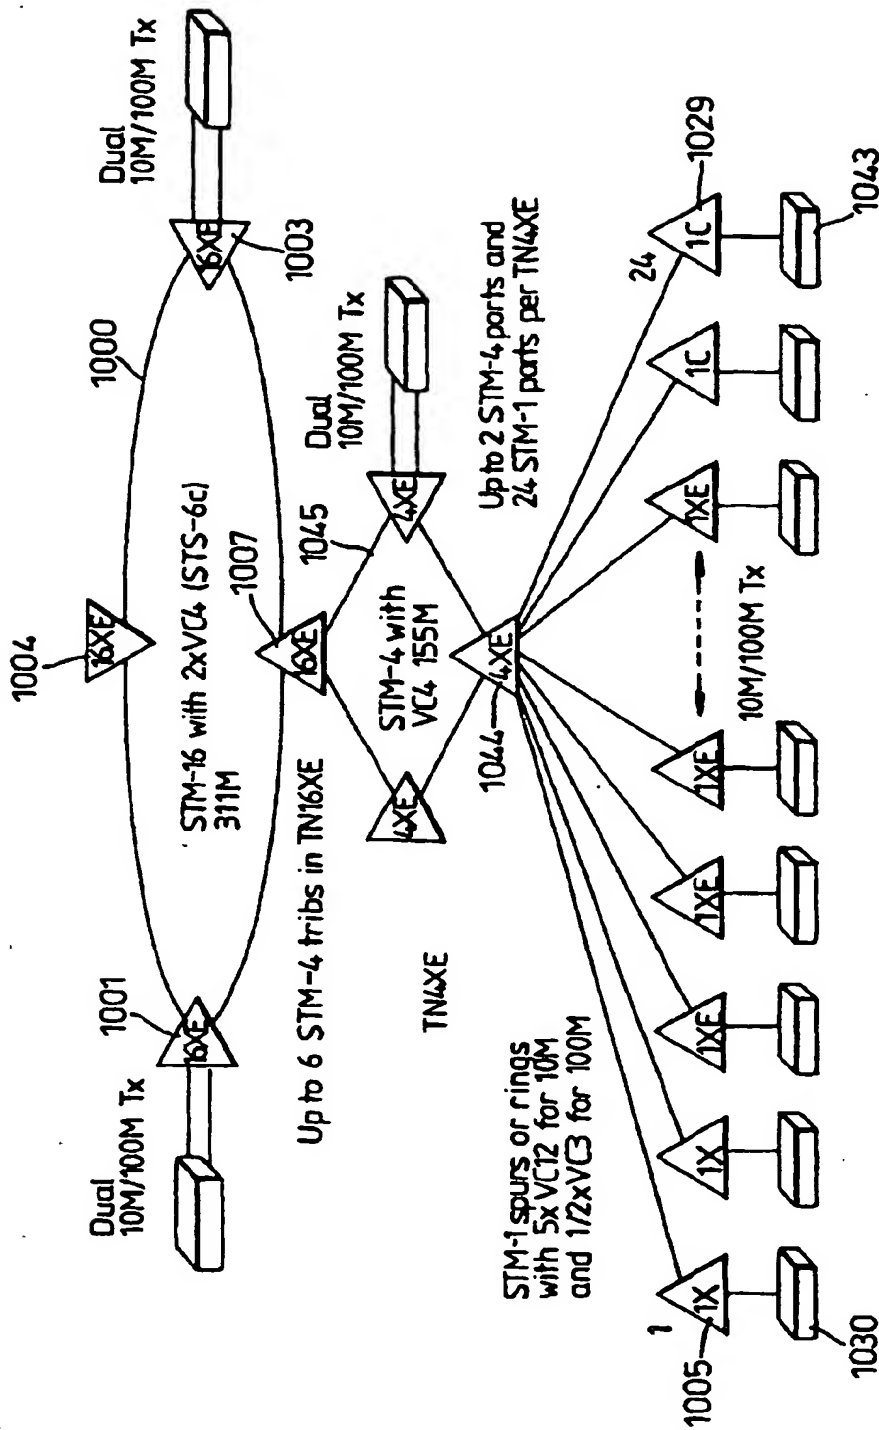

**Fig. 10**

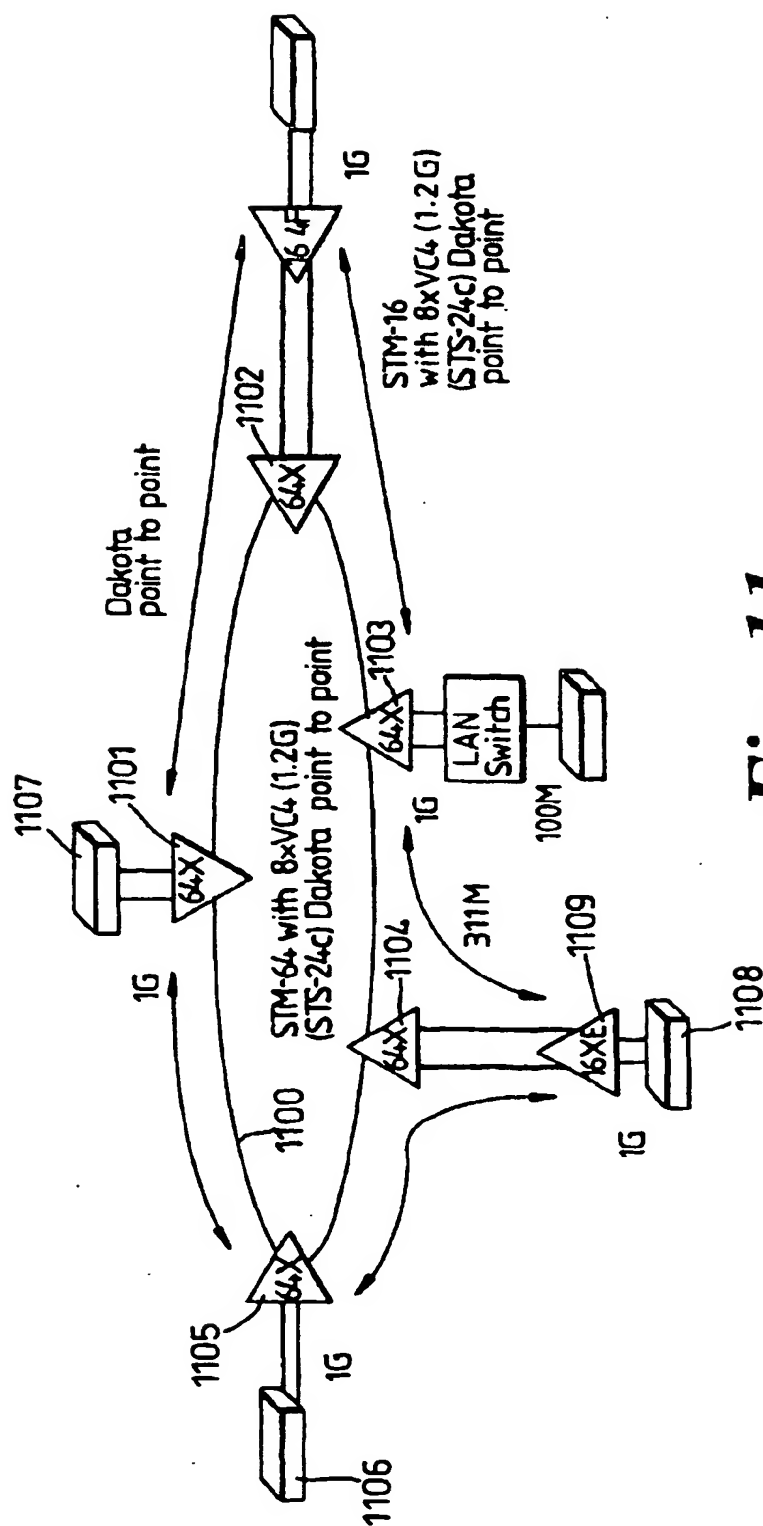



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 982 900 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
30.01.2002 Bulletin 2002/05

(51) Int Cl.7: **H04L 12/56, H04J 3/24,**  
**H04J 3/16, H04L 12/46**

(43) Date of publication A2:  
01.03.2000 Bulletin 2000/09

(21) Application number: **99304876.8**

(22) Date of filing: **22.06.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

- **Murton, Christopher David**  
Chelmsford, Essex CM2 8AR (GB)
- **Goodman, David Michael**  
St Albans, Hertfordshire AL4 9XA (GB)
- **Ramsden, Christopher Thomas William**  
Hertford, Hertfordshire SG14 3ES (GB)
- **Shields, James**  
Whitehead, Carrickfergus BT38 9NS (IE)

(30) Priority: **27.08.1998 US 143466**


(71) Applicant: **Nortel Networks Limited**  
**Montreal, Quebec H2Y 3Y4 (CA)**

(74) Representative: **Bewley, Ewan Stuart**  
**Nortel Networks Intellectual Property Law Group**  
**London Road**  
**Harlow, Essex CM17 9NA (GB)**

(72) Inventors:  
• **Russell, John Paul**  
**Sawbridgeworth, Hertfordshire CM21 9BB (GB)**

(54) **Frame based data over synchronous digital hierarchy network**

(57) A frame based data communications network is interfaced to a synchronous digital hierarchy network via a plurality of frame based data port cards incorporated into a plurality of synchronous multiplexers. Each port card comprises a conventional frame based data port, a frame switch, a rate adapter means and a mapping means for mapping data frames into a plurality of SDH virtual containers. Frame based data is incorporated directly into a synchronous virtual container without encapsulation in an intermediate protocol. A number of topologies of a frame based data channel network are possible, overlaid on the underlying synchronous transport network, including an open loop topology, a ring mode topology, and a backhaul topology.

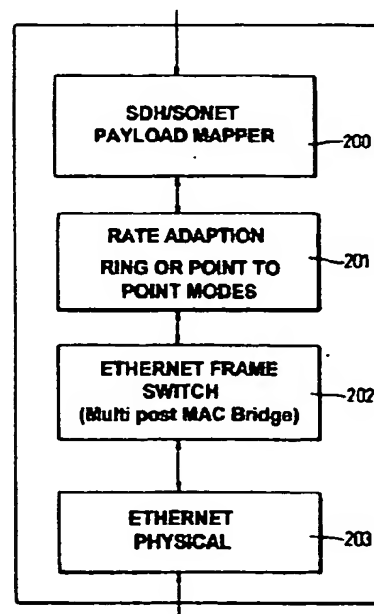

**Fig. 2**

**EP 0 982 900 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 4876

| DOCUMENTS CONSIDERED TO BE RELEVANT  |   |  |  |
|--|---|--|--|
| Category   | Citation of document with indication, where appropriate, of relevant passages   | Relevant to claim  | CLASSIFICATION OF THE APPLICATION (In CL7)     |
| X  | US 5 247 518 A (TAKIYASU YOSHIHIRO ET AL)<br>21 September 1993 (1993-09-21)<br><br>* abstract; figures 1,2,3A,3B,8,13 *<br>* column 4, line 21 - line 39 *<br>* column 6, line 19 - line 44 *<br>* column 7, line 9 - line 24 *<br>* column 8, line 15 - line 25 *<br>* column 10, line 16 - line 32 *  | 1,3-8,<br>10-15,<br>17-25                                  | H04L12/56<br>H04J3/24<br>H04J3/16<br>H04L12/46 |
| X  | WO 98 04072 A (CABLETRON SYSTEMS INC)<br>29 January 1998 (1998-01-29)<br><br>* abstract; figures 2,3,7-10,13,14,19,22 *<br>* page 3, line 3 - page 4, line 2 *<br>* page 8, line 3 - line 9 *<br>* page 9, line 3 - line 5 *<br>* page 10, line 22 - page 11, line 26 *<br>* page 15, line 29 - page 16, line 18 *<br>* page 17, line 29 - page 18, line 20 * | 1-8,<br>10-14,<br>17,19,<br>21-23                          |  |
|  |   |  | TECHNICAL FIELDS<br>SEARCHED (In CL7)          |
| X  | US 5 581 566 A (ST JOHN WALLACE B ET AL)<br>3 December 1996 (1996-12-03)<br><br>* column 1, line 43 - line 55 *<br>* column 3, line 42 - column 4, line 38 *<br>* column 7, line 8 - column 8, line 14 *<br>* column 9, line 37 - column 10, line 17 *<br>* figures 1,2,5,6 *   | 1-3,<br>5-14,17,<br>19,21-23                               | H04J<br>H04L                                   |
| The present search report has been drawn up for all claims   |   |  |  |
| Place of search<br><b>THE HAGUE</b>  |   | Date of completion of the search<br><b>6 December 2001</b> | Examiner<br><b>Fouasson, O</b>                 |
| <p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone<br/>Y : particularly relevant if combined with another document of the same category<br/>A : technological background<br/>O : non-written disclosure<br/>P : intermediate document</p> <p>T : theory or principle underlying the invention<br/>E : earlier patent document, but published on, or after the filing date<br/>D : document cited in the application<br/>L : document cited for other reasons<br/>A : member of the same patent family, corresponding document</p> |   |  |  |

EPO FORM 1502 02 01 (7/94 Cat)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 4876

| DOCUMENTS CONSIDERED TO BE RELEVANT  |  |  |  |
|--|--|--|--|
| Category   | Citation of document with indication, where appropriate, of relevant passages  | Relevant to claim  | CLASSIFICATION OF THE APPLICATION (Int.Cl.7) |
| X  | EP 0 656 704 A (NEDERLAND PTT)<br>7 June 1995 (1995-06-07)   | 1,3-6,8,<br>10-13,<br>17,18,<br>23-25                      |  |
| A  | * abstract; figures 1-3 *<br>* column 5, line 41 - column 6, line 18 *<br>* column 6, line 41 - line 52 *  | 7,14-16,<br>19-22  |  |
| X  | FLANAGAN T ET AL: "TRANSPORING NEW<br>HIGH-SPEED SERVICES IN ACCESS NETWORKS"<br>PROCEEDINGS OF THE INTERNATIONAL SYMPOSIUM<br>ON SUBSCRIBER LOOPS AND SERVICES. (ISSLS).<br>BOSTON, SEPT. 11 - 16, 1988, NEW YORK,<br>IEEE, US,<br>vol. SYMP. 8,<br>11 September 1988 (1988-09-11), pages<br>165-168, XP000010469 | 1,3-6,8,<br>10-13,<br>17,18,<br>23-25                      |  |
| A  | * abstract; figures 2,3 *<br>* page 166, right-hand column, paragraph<br>2.2 - page 168, left-hand column,<br>paragraph 3.2 *  | 7,14-16,<br>19-22  | TECHNICAL FIELDS<br>SEARCHED (Int.Cl.7)      |
| A  | HEYWOOD P: "A SWITCH IN PLANS"<br>DATA COMMUNICATIONS, MCGRAW HILL. NEW<br>YORK, US,<br>vol. 27, no. 10, 1 July 1998 (1998-07-01),<br>pages 25-26, XP000772936<br>ISSN: 0363-6399<br>* the whole document *  | 1,6,8,<br>10,12,<br>14-19,<br>23-25                        |  |
| The present search report has been drawn up for all claims   |  |  |  |
| Place of search<br><b>THE HAGUE</b>  |  | Date of completion of the search<br><b>6 December 2001</b> | Examiner<br><b>Fouasson, O</b>               |
| <p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone<br/>Y : particularly relevant if combined with another document of the same category<br/>A : technological background<br/>O : non-written disclosure<br/>P : intermediate document</p> <p>T : theory or principle underlying the invention<br/>E : earlier patent document, but published on, or after the filing date<br/>D : document cited in the application<br/>L : document cited for other reasons<br/>A : member of the same patent family, corresponding document</p> |  |  |  |

EP FORM 1503 (03.02) (P4/C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 4876

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-12-2001

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| US 5247518                                | A | 21-09-1993          | JP 2067842 A               | 07-03-1990          |
|   |   |                     | JP 2714028 B2              | 16-02-1998          |
|   |   |                     | JP 2276339 A               | 13-11-1990          |
|   |   |                     | JP 2834242 B2              | 09-12-1998          |
|   |   |                     | US 5103447 A               | 07-04-1992          |
|   |   |                     | US 5241543 A               | 31-08-1993          |
| WO 9804072                                | A | 29-01-1998          | US 6122281 A               | 19-09-2000          |
|   |   |                     | AU 707746 B2               | 15-07-1999          |
|   |   |                     | AU 3732897 A               | 10-02-1998          |
|   |   |                     | CA 2260054 A1              | 29-01-1998          |
|   |   |                     | EP 0916213 A1              | 19-05-1999          |
|   |   |                     | WO 9804072 A1              | 29-01-1998          |
| US 5581566                                | A | 03-12-1996          | NONE                       |                     |
| EP 0656704                                | A | 07-06-1995          | NL 9302040 A               | 16-06-1995          |
|   |   |                     | EP 0656704 A1              | 07-06-1995          |

EP0 982 900 A3

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**